

visionary[™]
DESIGNS

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING



Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions before attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

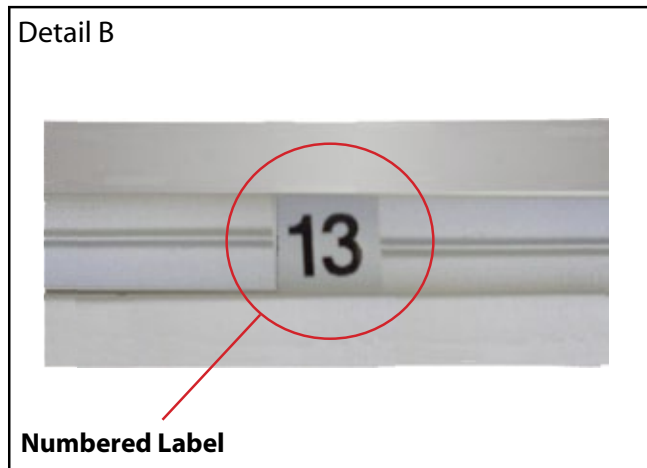


Each extrusion contains a numbered label which corresponds with setup instructions.


The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.

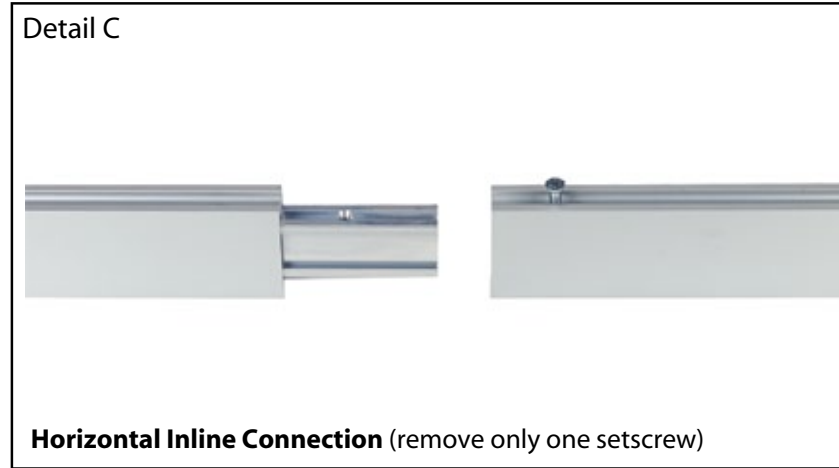

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

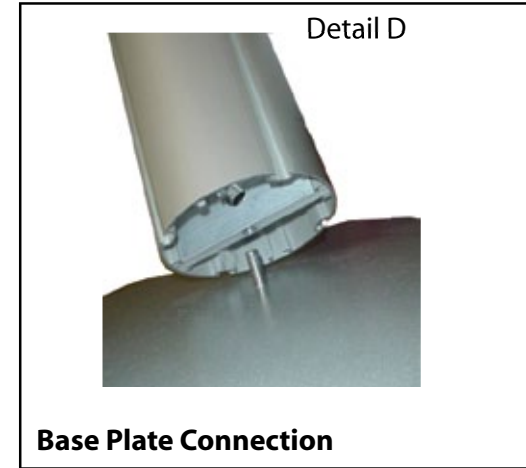

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

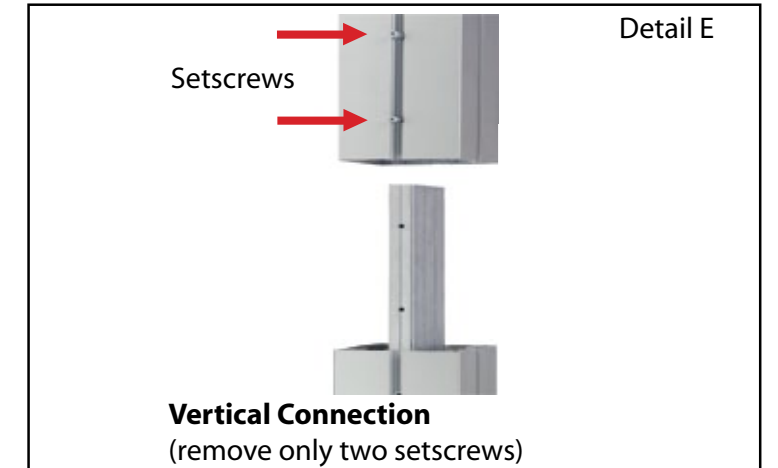

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS


Euro LT Hybrids General Setup Instructions

Using Your Setup Instructions


The Euro LT Hybrid Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

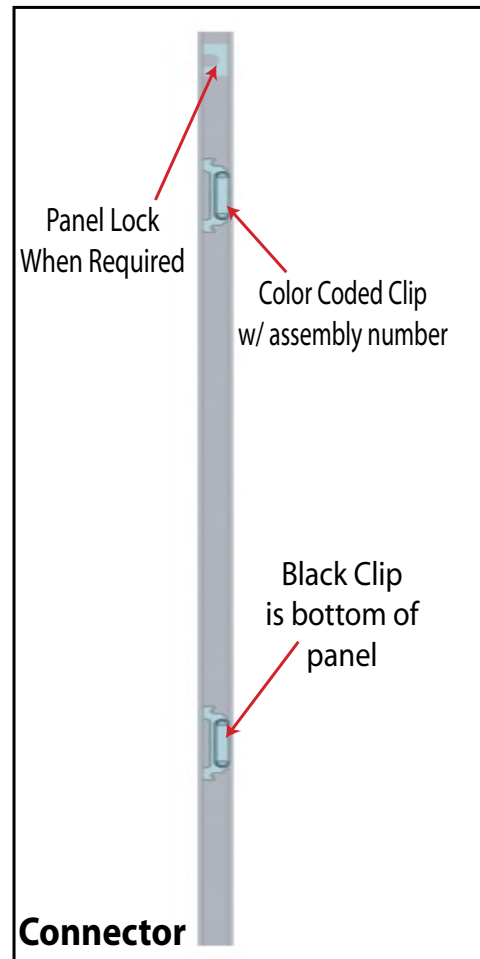

Each component has 2 clips, the lower clip is ALWAYS black.

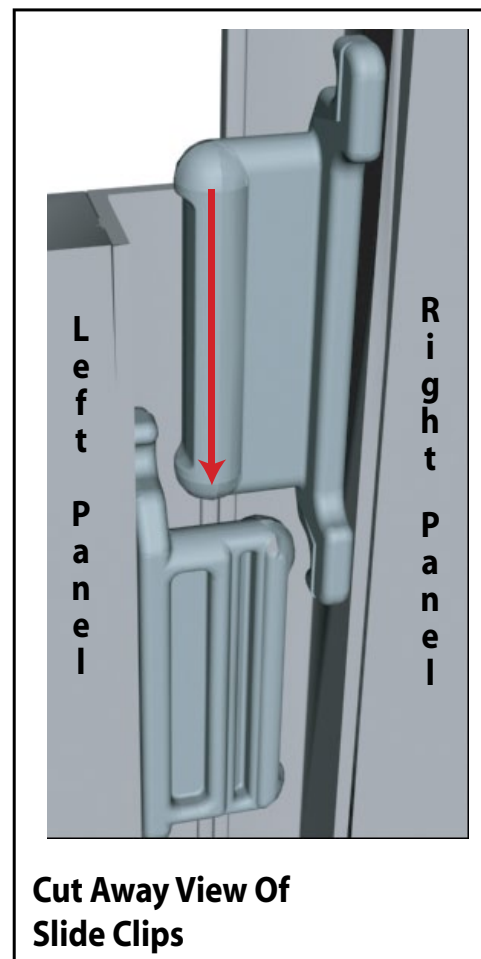

Components connect together by aligning them and sliding downward connecting clips together.

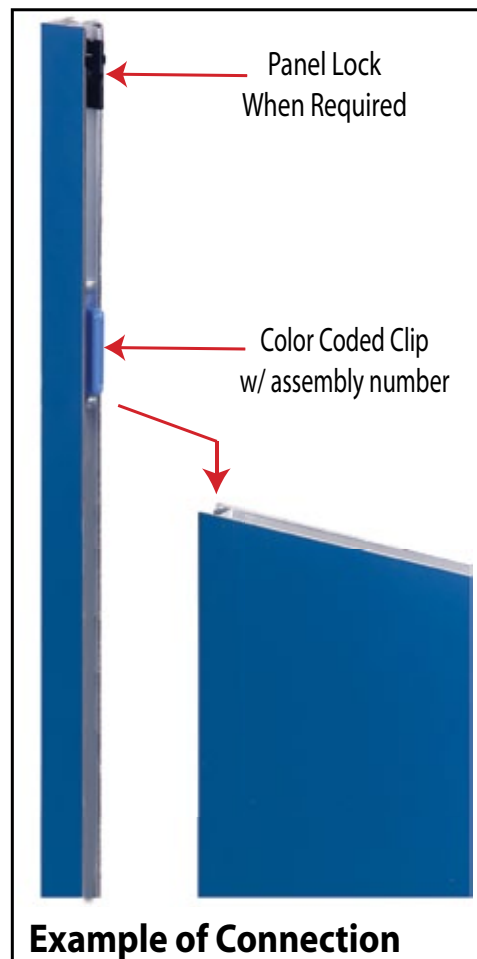

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.


Cleaning and Packing Your Display

- 1) When cleaning laminate countertops or panels use mild cleansers and a soft material such as cotton.
- 2) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 3) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


Level 1 = Blue
 Level 2 = Red
 Level 3 = Green
 Level 4 = Black

Color Code

The top clip is color coded to distinguish the level. The color coded clip also contains the numbered label.

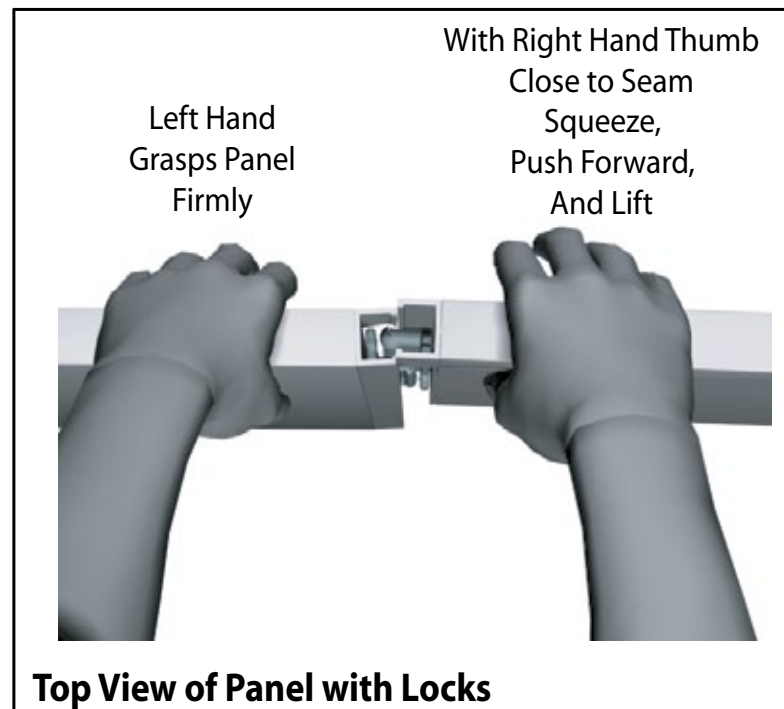

The first level of components contains panel locks that are located at the top of the panel for extra stability and a seamless connection. When disassembling panels, twist top connection slightly and lift right panel upward.

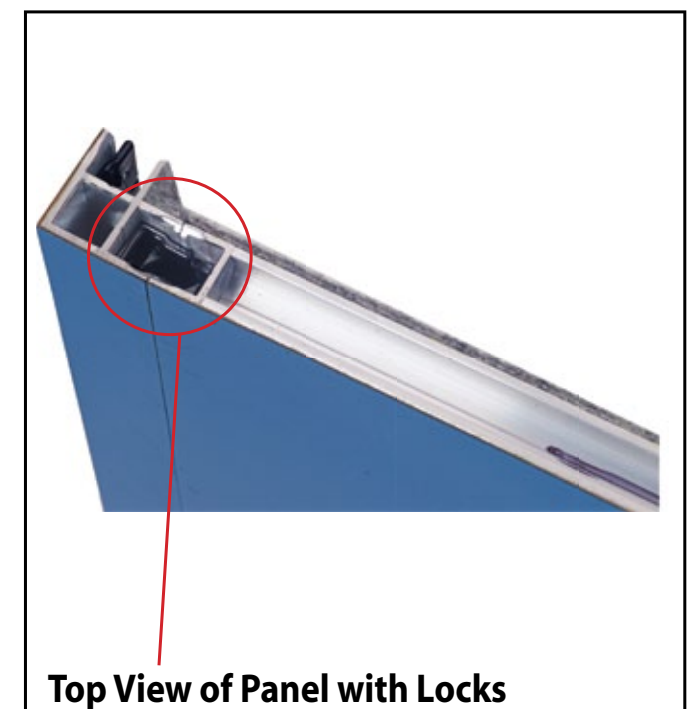


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

Item	Qty.	Description
1	1	Base Plate
2	1	25" w Lower horizontal
3/3A	1/1	35" h Lower Verticals
4/4A	1/1	35" h Center Verticals
5/5A	1/1	25" h Top Verticals
6/6A	1/1	35" w Upper Horizontals



Steps:

- 1) Attach base plate to lower horizontal [2].
- 2) Connect lower and center verticals as shown.
- 3) Connect top vertical to lower verticals as shown in detail.
- 4) Attach upper horizontals together.
- 5) Connect each corner as shown in detail.

866.652.2100

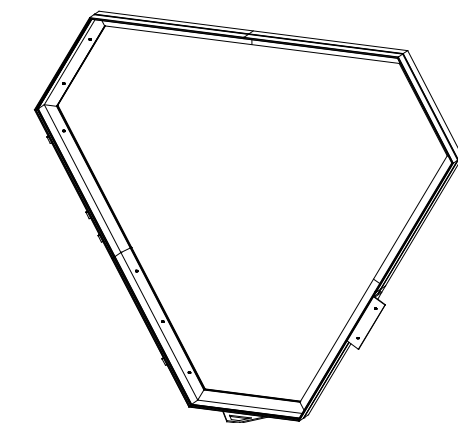

When assembled

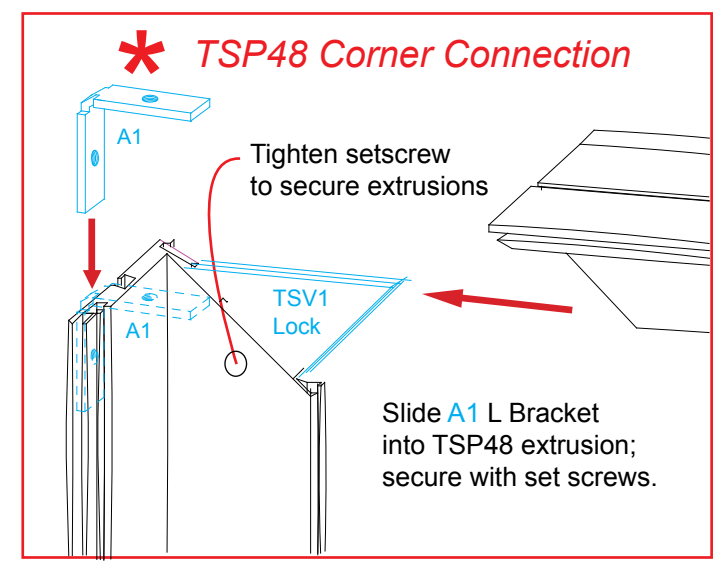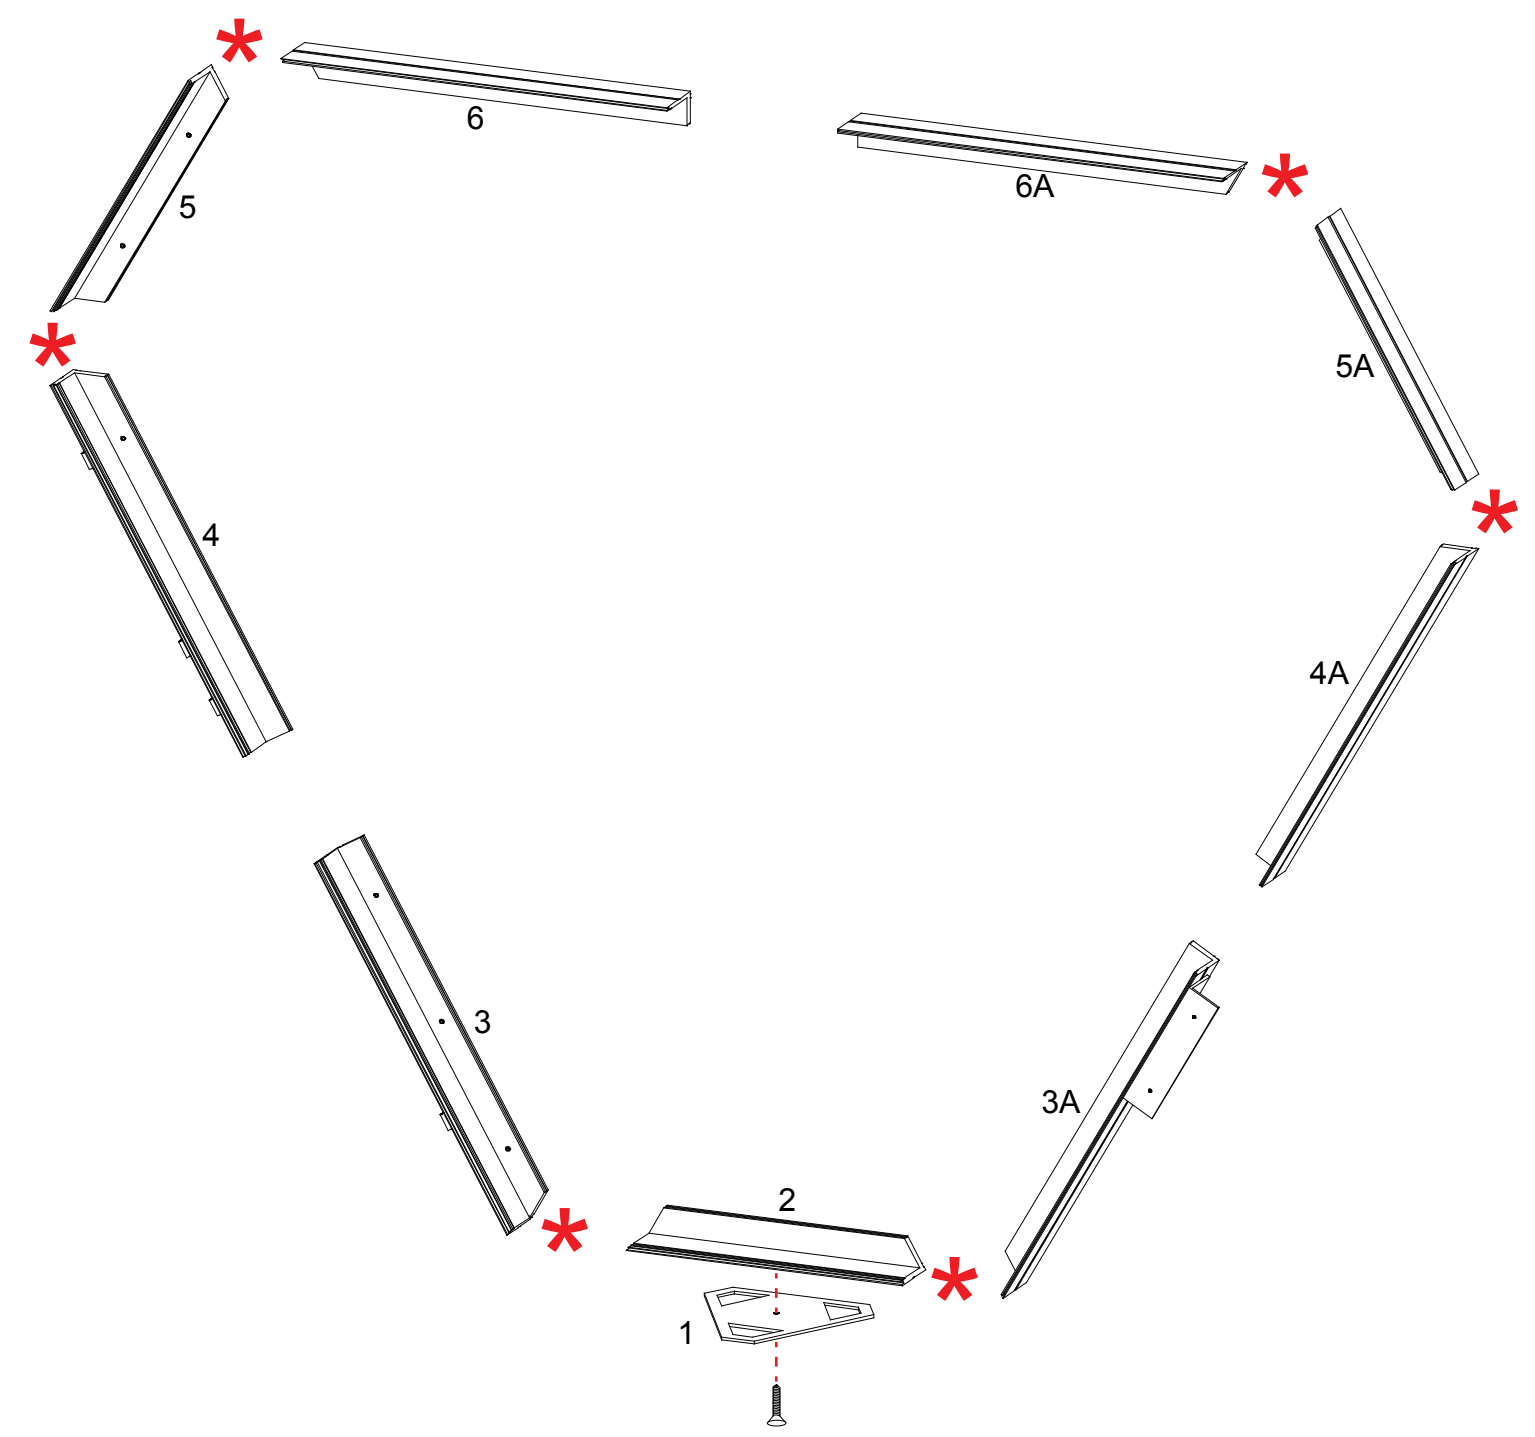

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Steps:


- 1) Attach infill graphic to back of assembled frame as shown.
- 2) Attach wings to A10 clamps as shown.

A10 Clamp Detail


Tighten set screw to secure A10 to extrusion.



Tighten knob to secure graphic header in place.

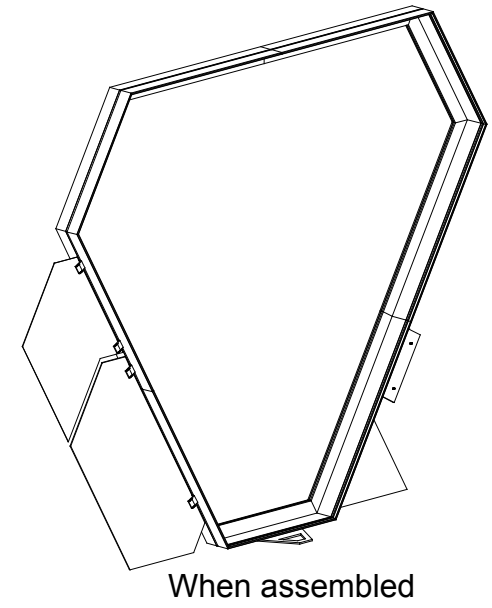

Graphic Infill Attachment

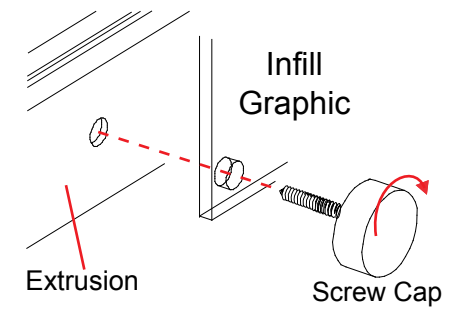


Infill Graphic

Extrusion

Screw Cap

Insert screw cap through hole of infill into threaded hole of extrusion. Turn screw cap clockwise to tighten and secure header in place.

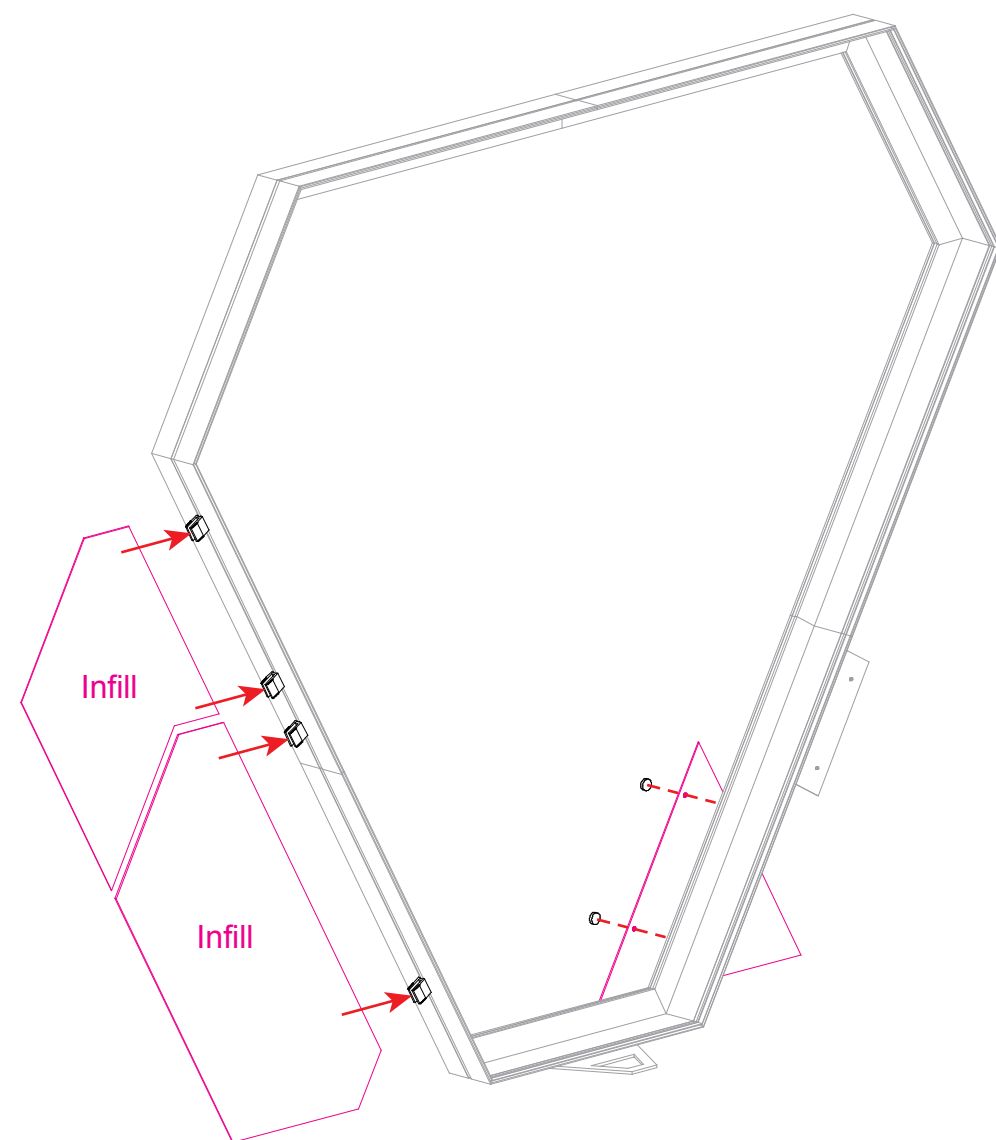

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item	Qty.	Description
7	1	40.5"h Vertical Extrusions
7A	1	30"h Vertical Extrusions

Steps:

- 1) Connect pedestal to backwall with stand off caps as shown.
- 2) Place lower vertical within pedestal.
- 3) Connect upper vertical to lower vertical
- 4) Attach monitor mount as shown in detail.
- 5) Attach Wire management to vertical.

Monitor Mount Attachment

Connectors

Attach monitor mount back plate to connectors using setscrews provided.

S44 Connector

Connector Piece

Screws

Slide extrusion over connector and rest on lower vertical; secure with screws.

****To prevent product loss, Keep all screws attached to connector piece after disassembling**



Wire Management Attachment *

Steps:

- 1) Run cords through plastic conduit.
- 2) Attach conduit where indicated by pinching the opening and inserting into the groove.


pinch

PR63 for wire management

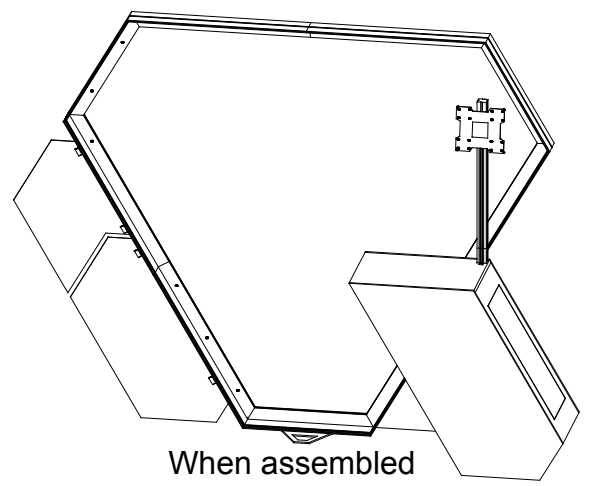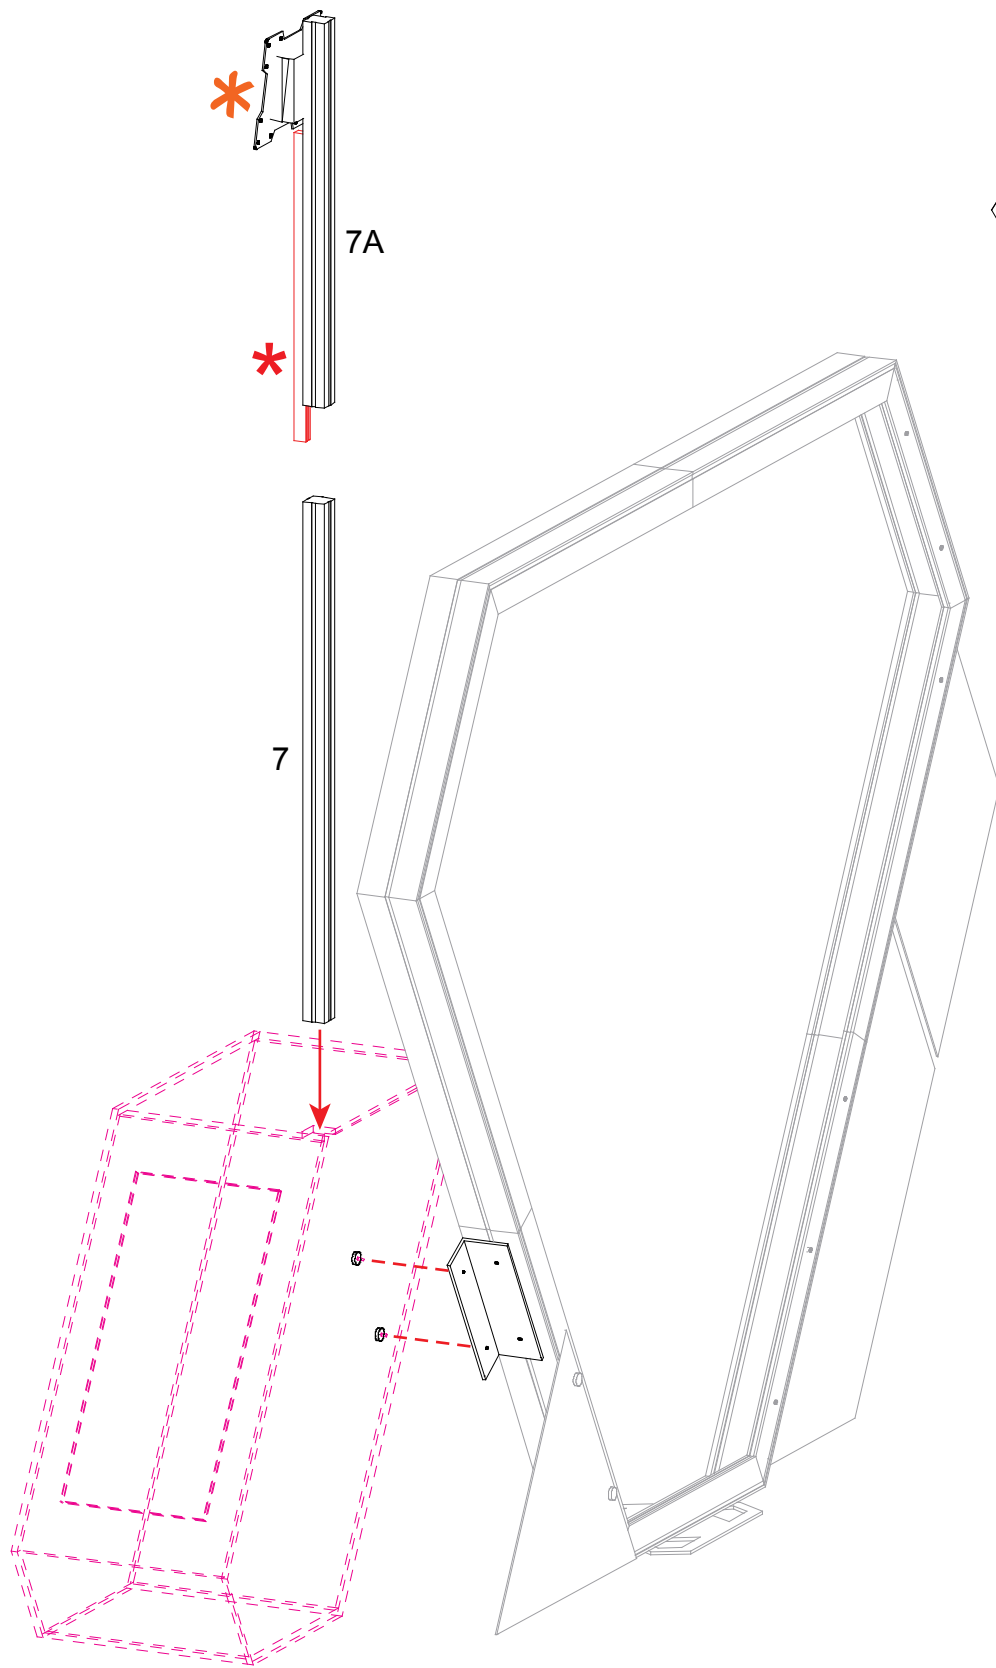

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

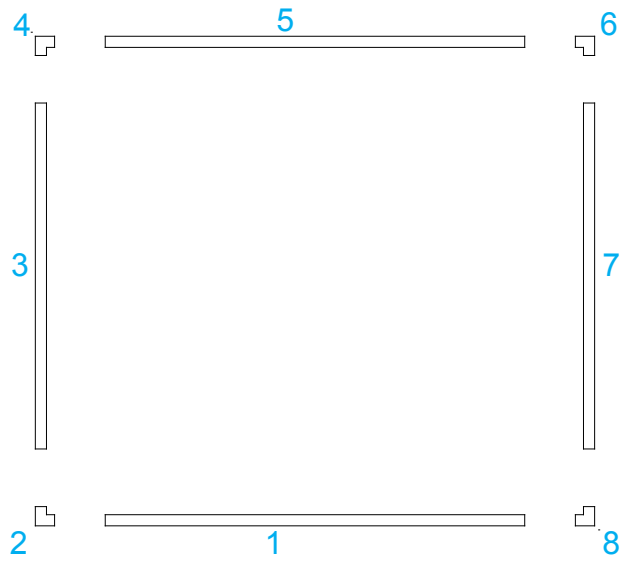




Item	Qty.	Description
1	1	19" w x 38" h Panel
2	1	38" h Corner Connector
3	1	19" w x 38" h Panel
4	1	38" h Corner Connector
5	1	19" w x 38" h Panel w/ door
6	1	38" h Corner Connector
7	1	19" w x 38" h Panel
8	1	38" h Corner Connector

Steps:

- 1) Connect each panel and connector together in numerical order.
- 2) Place shelf on shelf supports within the assembled pedestal.
- 3) Attach front graphic panel to front of pedestal as shown in detail.
- 4) place counter on top of assembled pedestal.

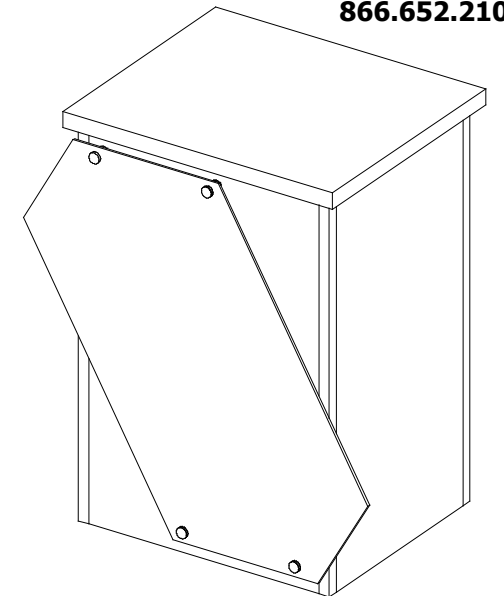

When assembled

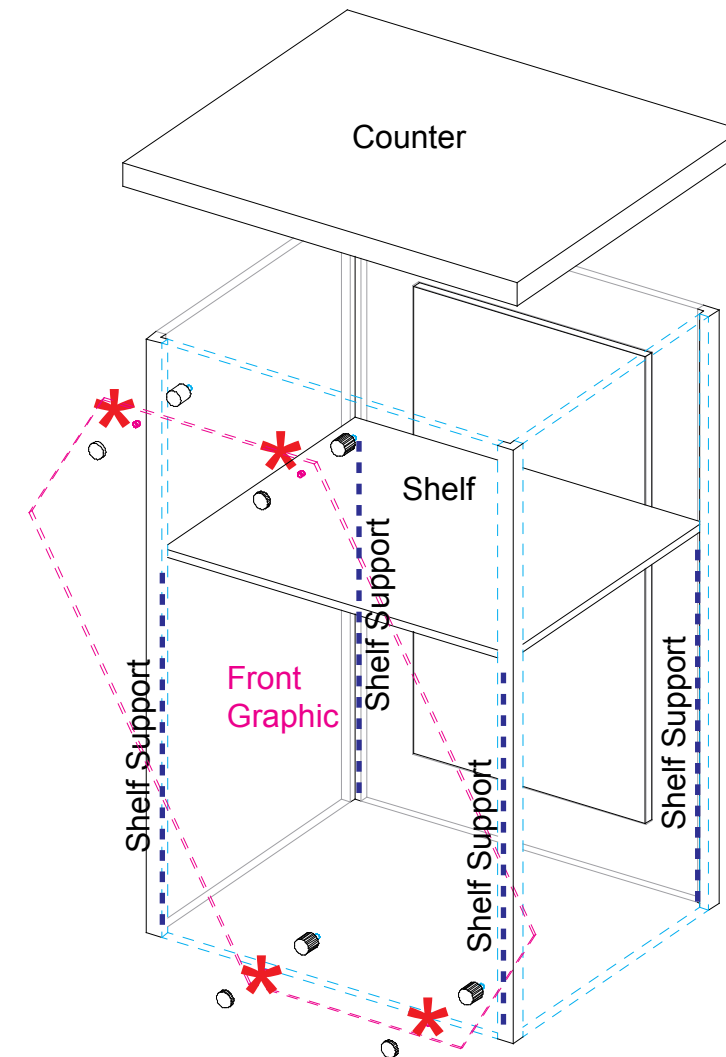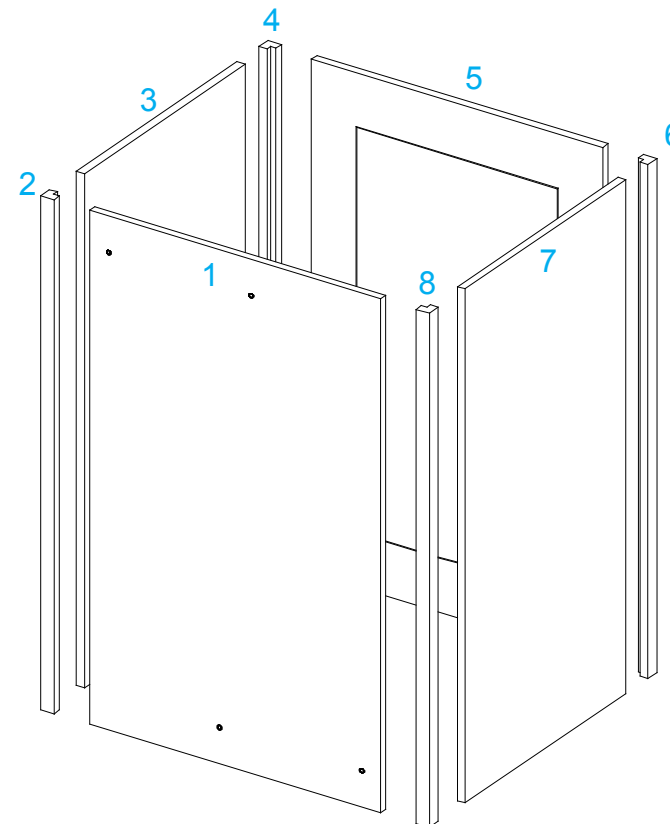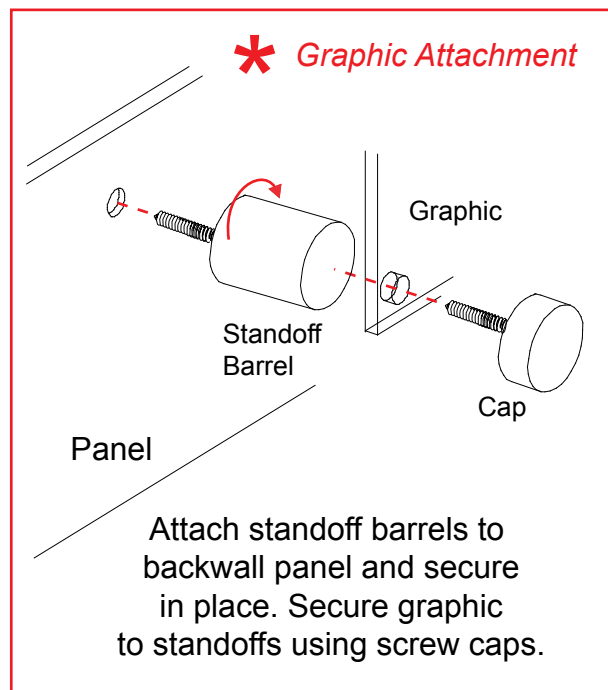

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING