
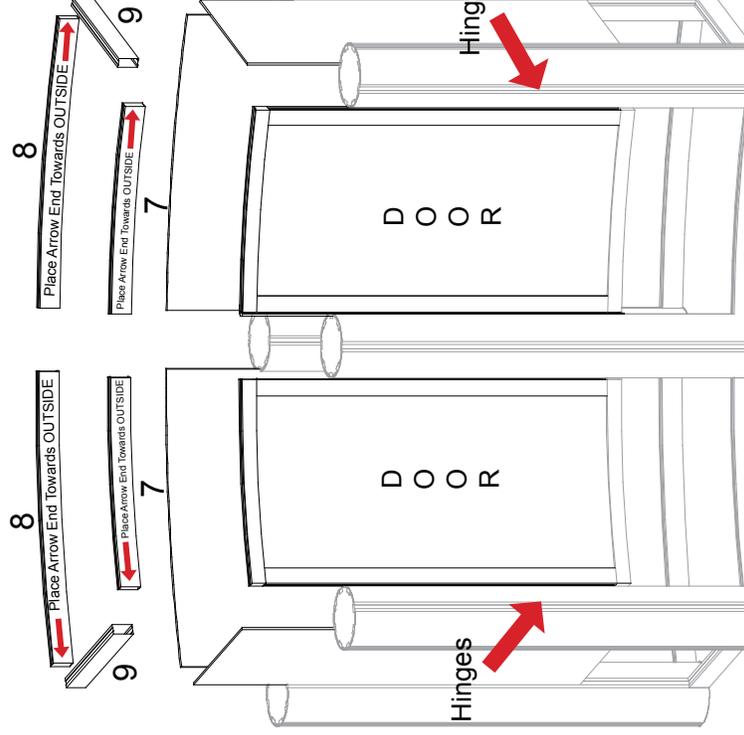
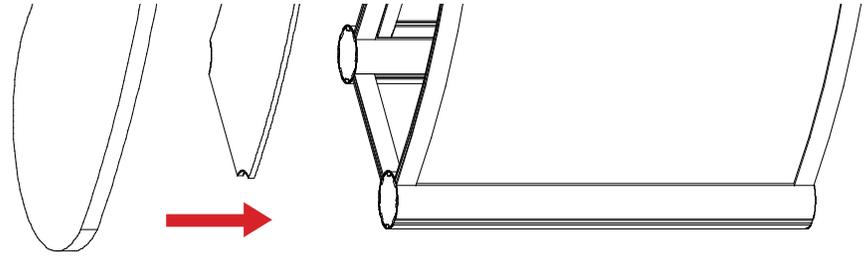


- 2) Place inserts and attach doors where indicated.
- 3) Attach upper horizontal extrusions [7, 8 and 9] between vertical extrusions [1, 2, 3, 4, 5 and 6] and on top of doors and inserts.
- 4) Attach shelf supports to velcro inside of assembled pedestal, then set internal shelf on supprts.
- 5) Place counter top on assembled pedestal.

n
n
n
n w/ Door Hinges
n w/ Door Stops
n w/ Door Hinges
Horizontal Extrusion
Horizontal Extrusion
ision

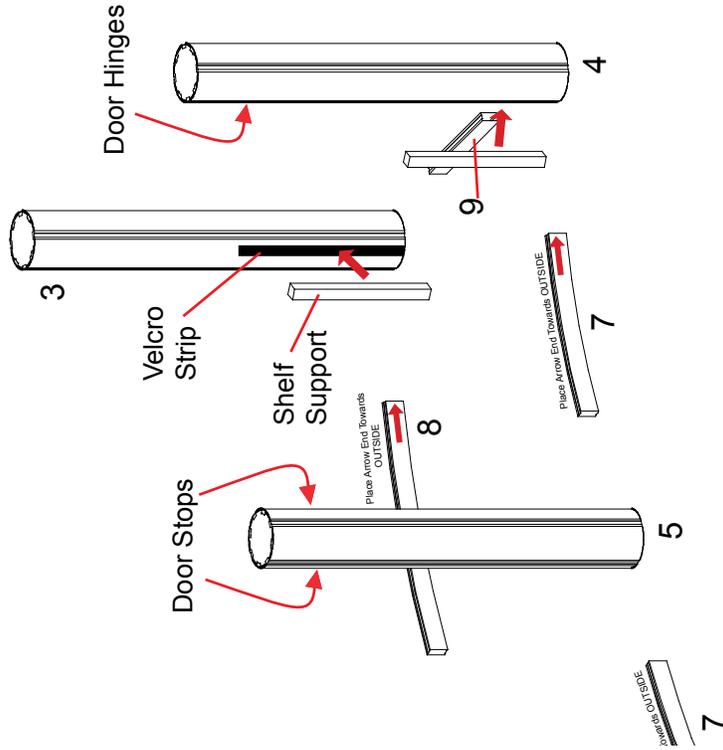

Instructions ■ DESIGNS

Instructions are created specifically for your exhibit, including an exploded view of a series of detailed steps to assemble the exhibit. We encourage you to study the instructions for your exhibit.

Remove the setscrews after disassembling your exhibit and setscrews (see below in RED).

1 Your Display

Remove any foam extrusion or acrylic inserts. Use only mild cleansers and a soft cloth for counter tops, use mild cleansers and avoid abrasive cleaners. Do not use any solvents or abrasives. Avoid exposure to ultraviolet light, heat, and long exposure to moisture. If necessary, use a mild detergent and warm water. If necessary, use a mild detergent and warm water. Do not use any solvents or abrasives. Avoid exposure to ultraviolet light, heat, and long exposure to moisture. If necessary, use a mild detergent and warm water.



The Tool

Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.



Detail A

Typical Connection

Most horizontal extrusion connections have a patented expansion groove on the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool creates a strong positive connection.



Typical Connection




Remove the red label which is on the extrusion. Signs the labels are otherwise specified.



Detail C

Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

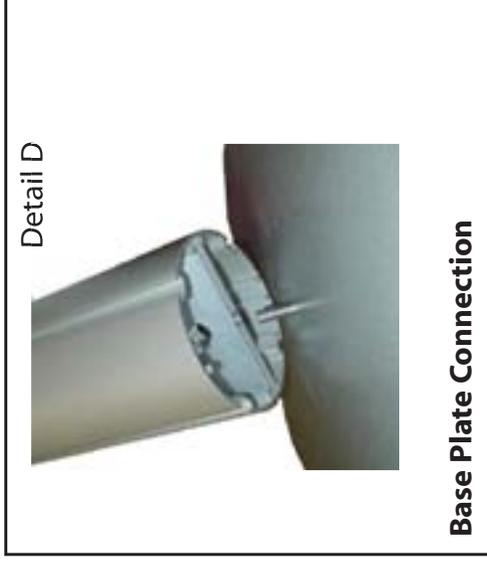

Detail D

Base Plate Connection

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.



Setscrew

Vertical (remove)

When a portable extrusion is used, the smaller assembly.

Remove the extrusion.