


10'

10'



When assembled

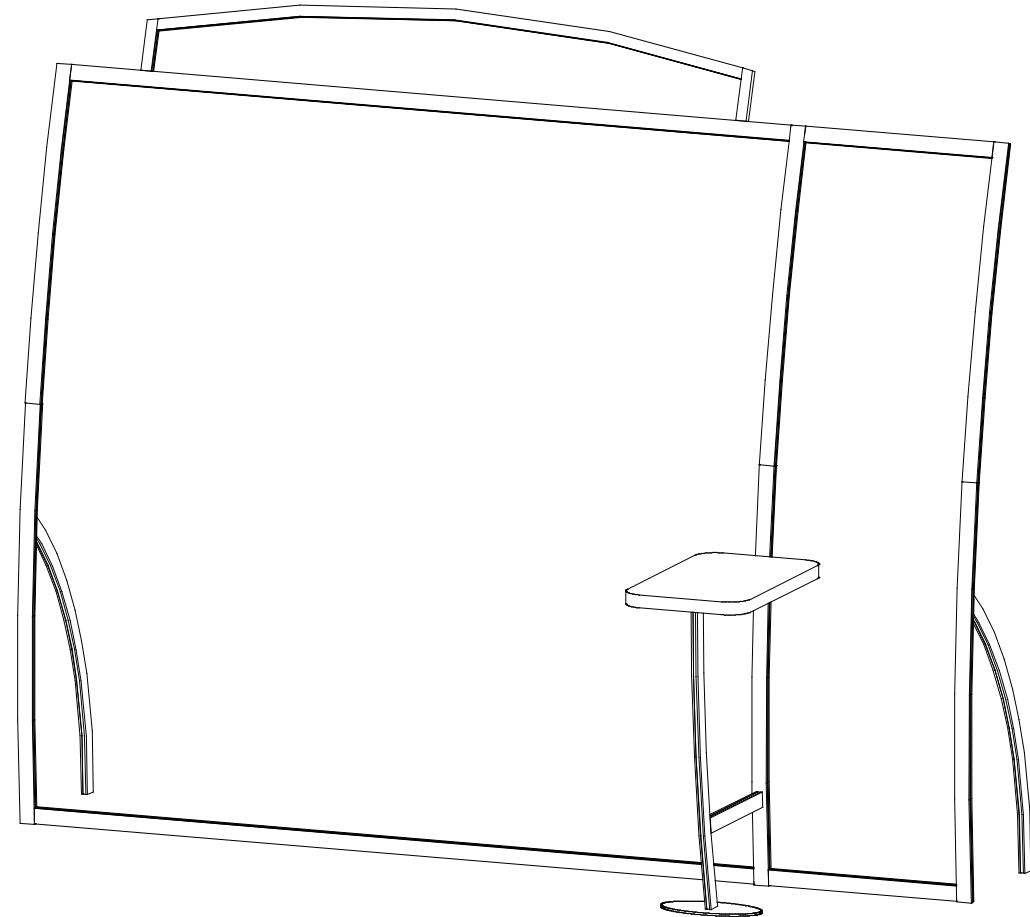

SETUP INSTRUCTIONS

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

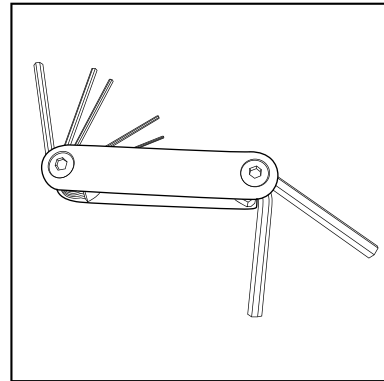


Hex Tool - Essential for Assembly

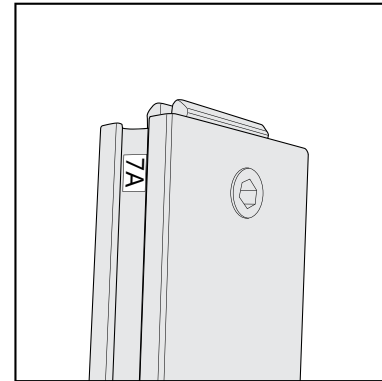


Part Identification - Numbering

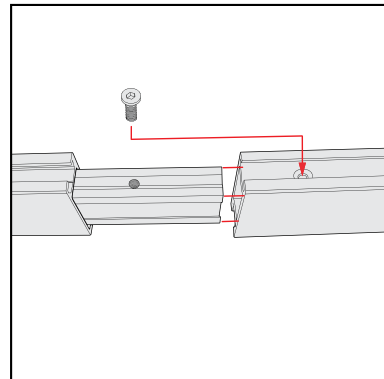


Spline Connection

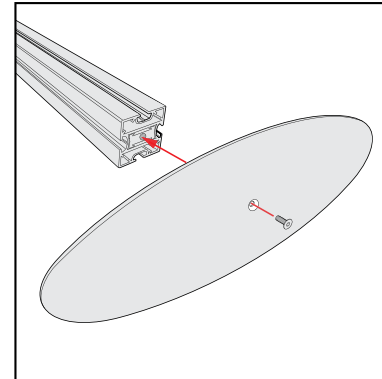

Base Plate & Extrusion Connection

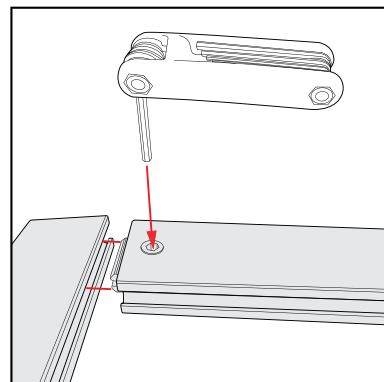

Extrusion & Lock Connection

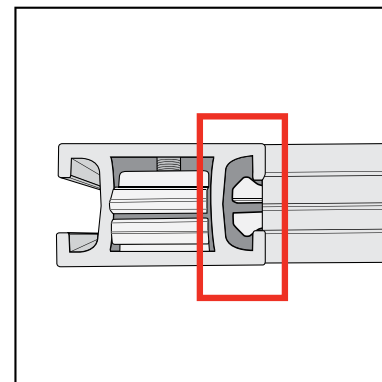

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Backwall Components

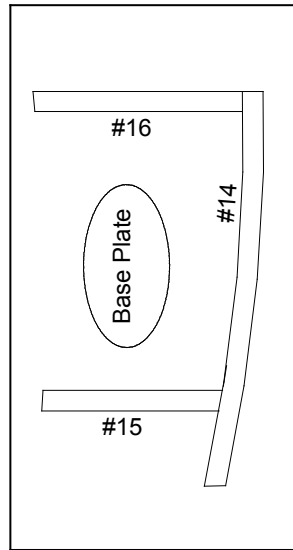


Level 1 (Bottom)

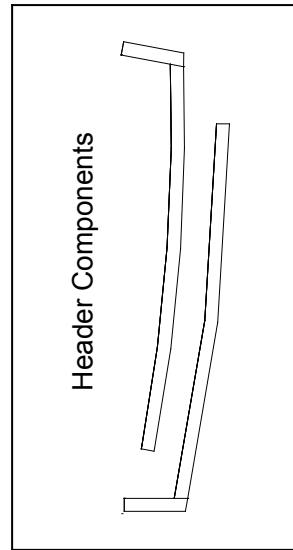


Level 2

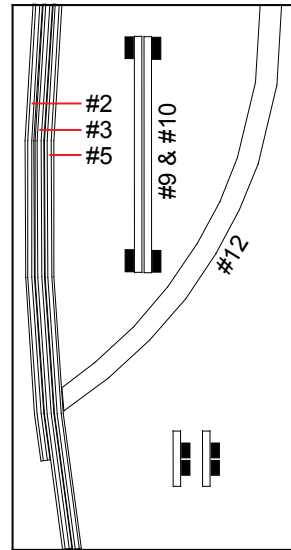

Level 3

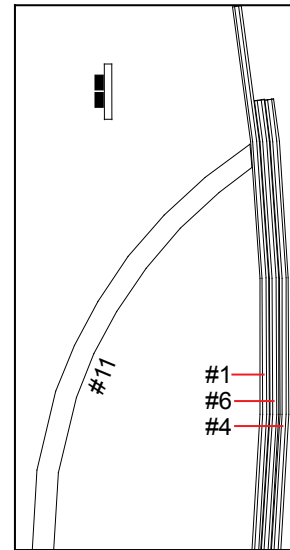

Level 4

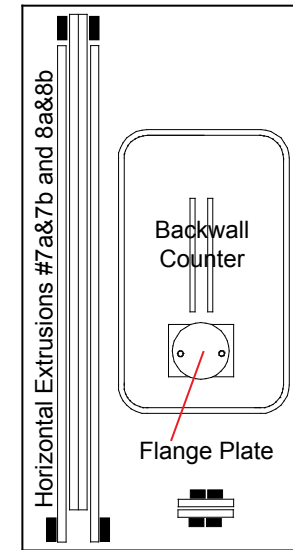

Level 5



Top View of Each Level

- Halogen Lights
- Graphics
- Setup Hardware


| Item | Qty. | Description |
|------|------|-------------------------------------|
| 1 | 1 | 47.9975" Lower Curved Extrusion |
| 1A | 1 | 38.5" Upper Curved Extrusion |
| 2 | 1 | 47.9975" Lower Curved Extrusion |
| 2A | 1 | 38.5" Upper Curved Extrusion |
| 3 | 1 | 47.9975" Lower Curved Extrusion |
| 3A | 1 | 38.5" Upper Curved Extrusion |
| 4 | 2 | 36.1425" Backwall Support Extrusion |
| 5/5A | 1/1 | 44"w Lower Horizontal Extrusion |
| 6/6A | 1/1 | 44"w Upper Horizontal Extrusion |
| 7/7A | 1/1 | 23"w Upper Horizontal Extrusion |

Steps:

- 1) Connect backwall upper and lower verticals together [1] to [1A], [2] to [2A] and [3] to [3A].
- 2) Connect horizontal extrusions together [5] to [5A] and [6] to [6A].
- 3) Attach horizontal assemblies [5/5A and 6/6A] between vertical assemblies [1/1A] and [2/2A].
- 4) Attach horizontal extrusions [7 and 7A] between vertical assemblies [2/2A and 3/3A].
- 5) Attach support leg extrusions [4] to back of verticals [1] and [3], see leg attachment detail.
- 6) Attach graphics to backwall where indicated.

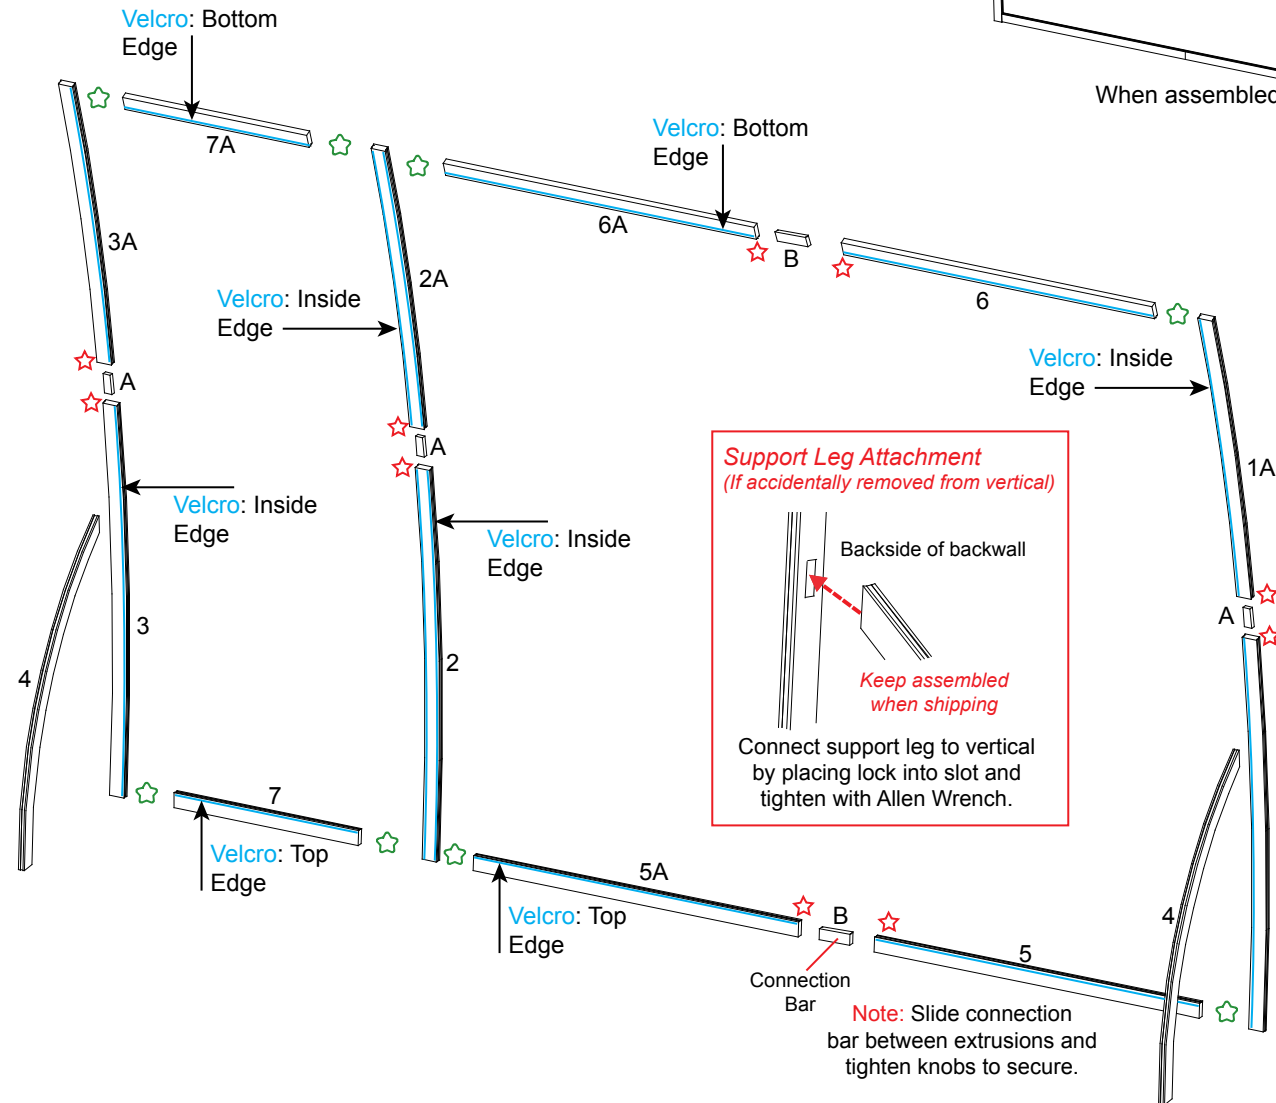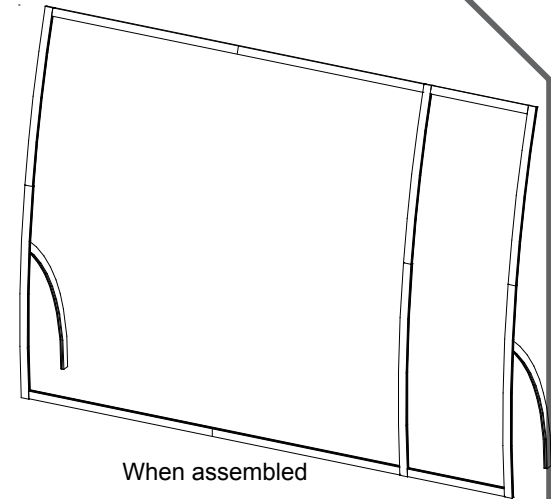


RED STAR indicates location of connection bar knob.



Turn Knob Clockwise to Tighten Lock

****Do not over tighten Knobs.****

GREEN STAR indicates location of connection lock with knob.







****Do not over tighten Knobs.****

| Item | Qty. | Description |
|------|------|-------------------------------|
| 8 | 1 | Base Plate |
| 9 | 1 | 37.476" h Vertical Extrusion |
| 9A | 1 | Flange Plate |
| 10 | 1 | 15.69" w Horizontal Extrusion |
| 11 | 1 | 18.5" w Horizontal Extrusion |

Steps:

- 1) Attach base plate to vertical [9].
- 2) Connect horizontals [10] & [11] between vertical [9] and backwall assembly.
- 3) Attach counter to upper horizontal [11] using mounting plate [9A]

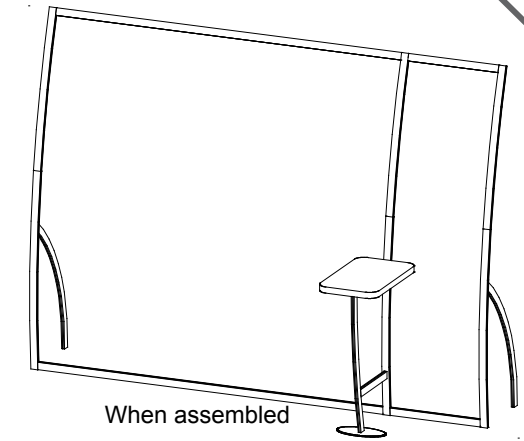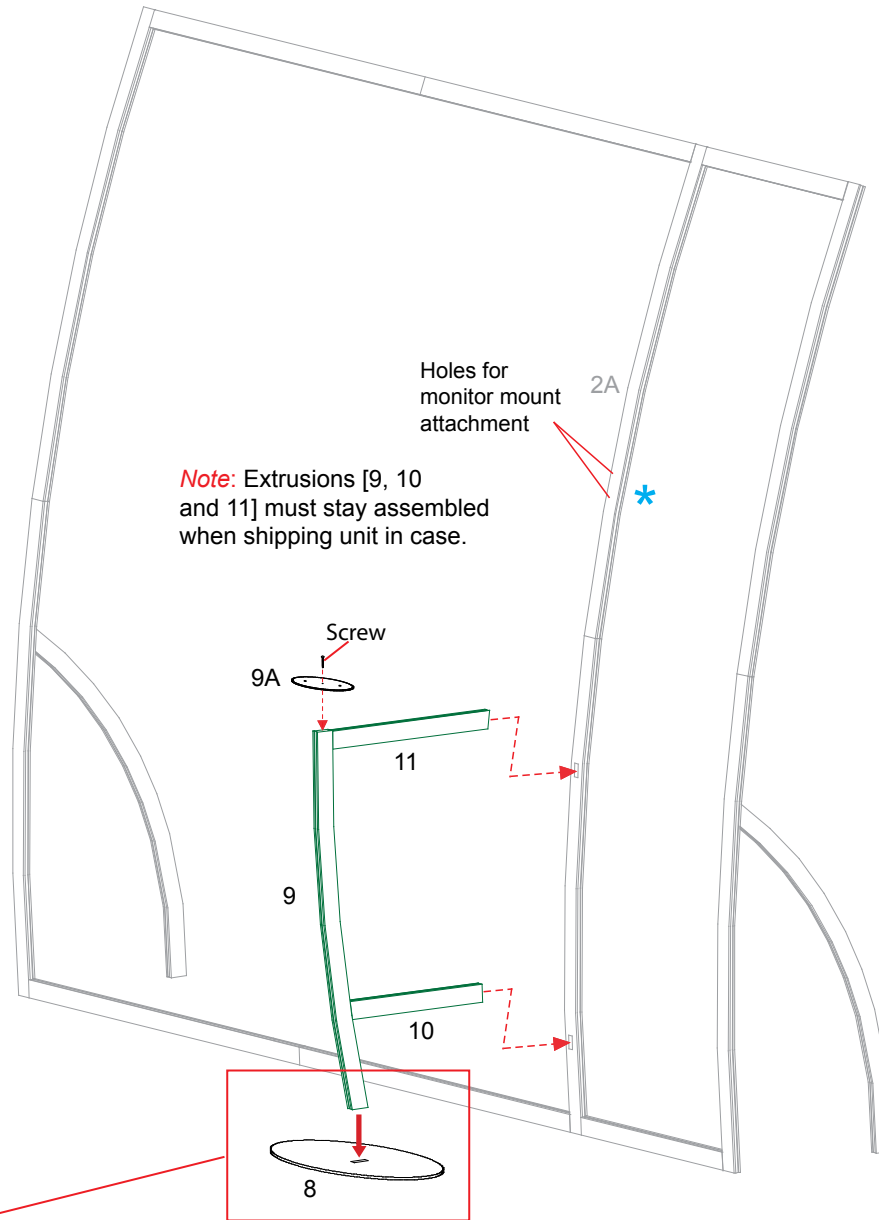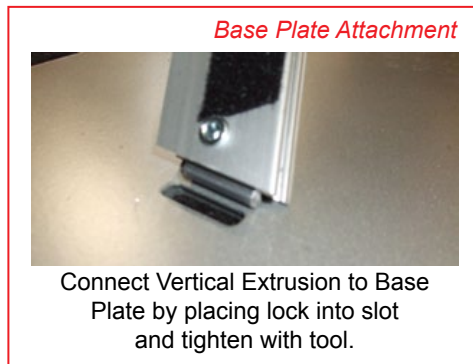

Counter Top Attachment

Insert screws located on underside of counter into holes on flange plate and secure with wing nuts.



| Item | Qty. | Description |
|--------|------|------------------------------|
| 12/12A | 1/1 | 6.0257" h Vertical Extrusion |
| 13/13A | 1/1 | 35.74" w Curved Horizontal |

- Steps:
- 1) Connect upper curved horizontals [13] & [13A] together.
 - 2) Attach verticals [12] & [12A] to each end of horizontals as shown.
 - 3) Attach header to upper backwall horizontals.

